




MX/15224

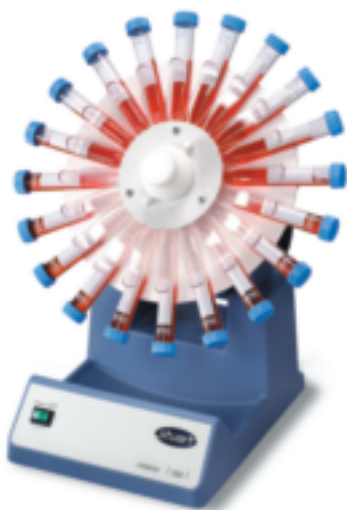

MX/15226

Mixers / rotating



Mixers, rotator type, model SB2 and SB3

- Fully adjustable mixing angle
- Choice of constant speed or variable speed models
- Choice of tube holders to hold a number of different sized tubes
- Spillage tray

These rotators can be used in incubators up to 60°C and in cold rooms down to 4°C. The angle of rotation is fully adjustable, from horizontal for minimal mixing to vertical for full end-over-end mixing. An integral tray catches any spillage from the rotating tubes. A choice of six tube holders is available to fulfil most applications. Holder must be ordered separately.

The SB2 gives gentle but effective mixing, ideal for keeping biological samples in suspension e.g. blood. The rotator has a constant speed of 20rpm. The SB3 is ideal for aerating cultures, keeping biological samples in suspension and for general mixing applications. A digital timer and speed display, allow procedures to be accurately repeated for optimal results.

Technical Specification		
	SB2	SB3
Speed range	Fixed – 20rpm	2 to 40rpm
Speed control	~	Digital
Timer	~	1 to 999 minutes
Dimensions (w x d x h)	200 x 270 x 230mm	200 x 270 x 230 mm
Net weight	3.2kg	3.2kg
Electrical supply	230V, 50Hz, 50W	230V, 50Hz, 50W

Cat. No.	Code	Description		
MX/15224	SB2	Rotator, fixed speed		
MX/15226	SB3	Rotator, variable speed, timer		
Tube holders		Tube type	Tube dia (mm)	No. of tubes
End-over-end action				
MX/15228	SB3/1	Micro tube	10 to 11.5	40
MX/15230	SB3/2	Test/blood tube	9 to 20	20
MX/15232	SB3/3	50ml centrifuge	25 to 35	12
Rolling action				
MX/15234	SB3/4	Culture tube	12	63
MX/15236	SB3/5	Culture tube	16	63
MX/15238	SB3/6	Culture tube	26	30